


AvtoKomander Operating Instructions




Do not connect the AvtoKomander to the ECU until all three connectors are removed!

Step 1: Disconnect the ECU from the vehicle wiring harness. All three connectors must be removed. Damage to the AvtoKomander can occur if all three connectors are not removed!

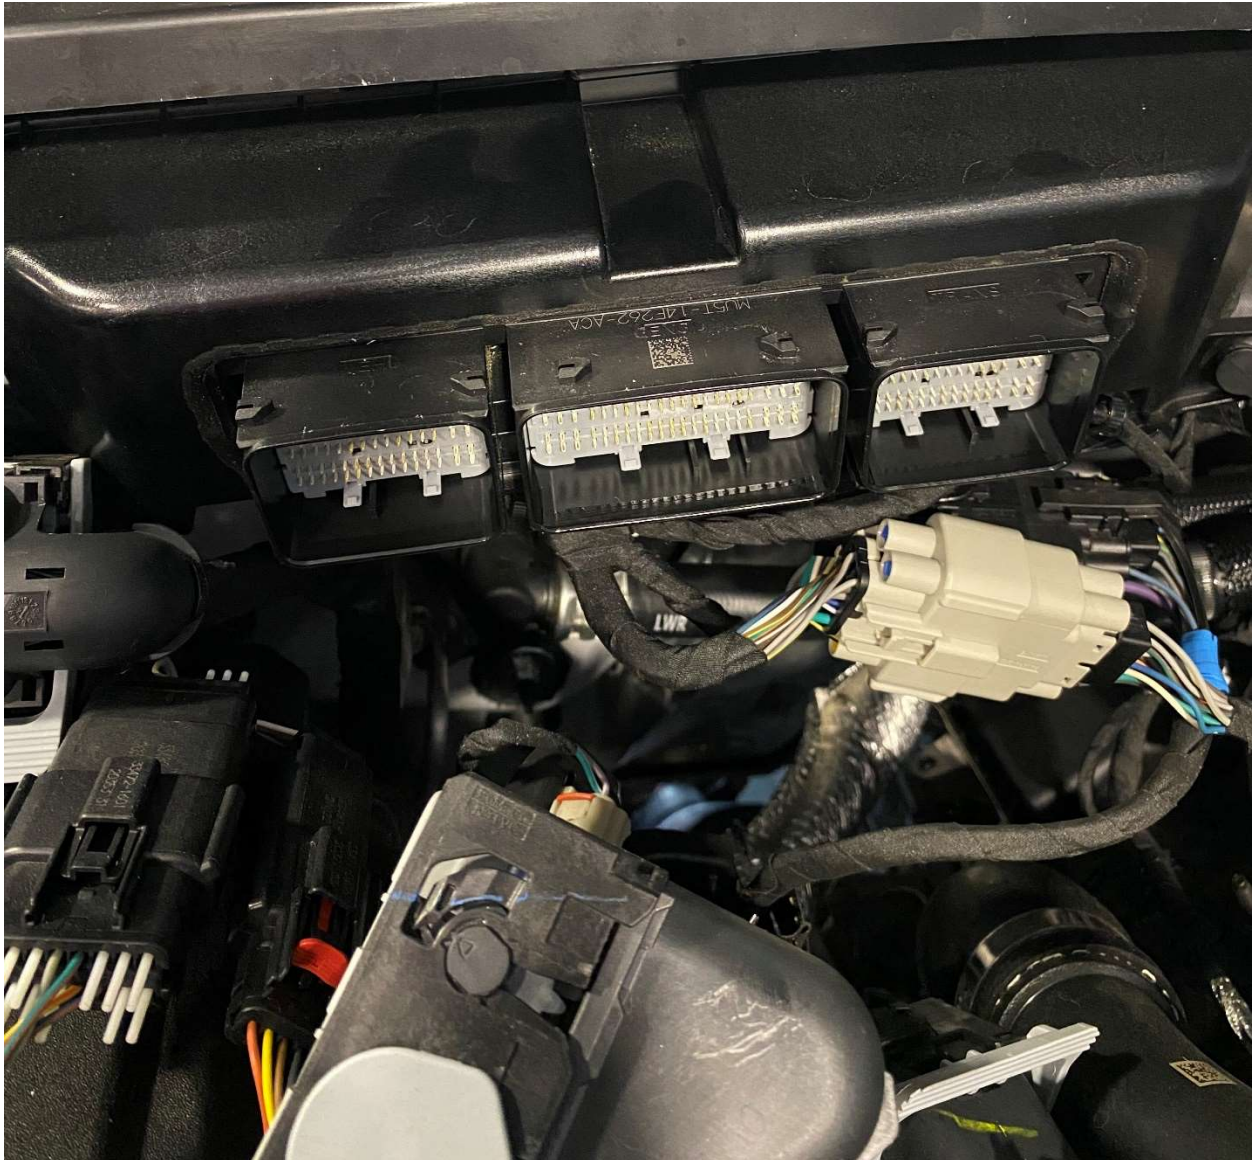

Step 2: Connect the AvtoKomander power harness to the vehicle battery. Make sure to connect red to positive and black to negative. The AvtoKomander is protected against reverse battery and can not malfunction from a reverse connection.

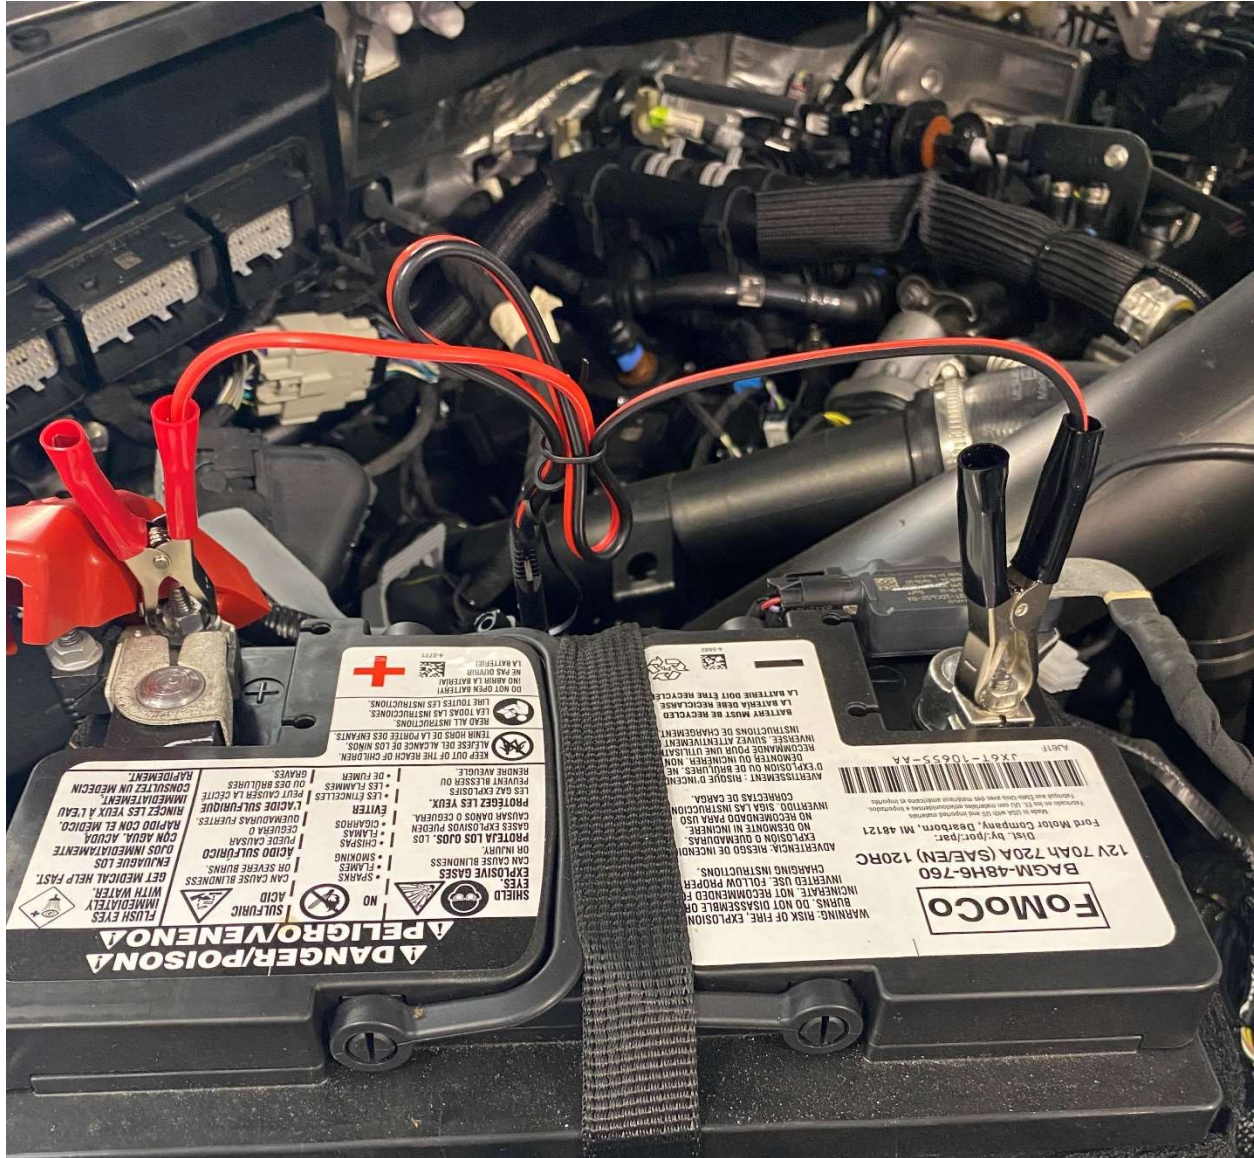

Step 3: Connect the AvtoKomander ECU connector to the ECU. The connector is marked “Vehicle” on the ECU (hidden by ECU cover) and will only fit in the correct location.




Step 4: Connect the AvtoKomander to the laptop and open the AvtoKomander software.

AvtoKomander Software Installation

Step 1: Install the USB drivers.

Step 2: Install the AvtoKomander software

AvtoKomander Software Operating Guide

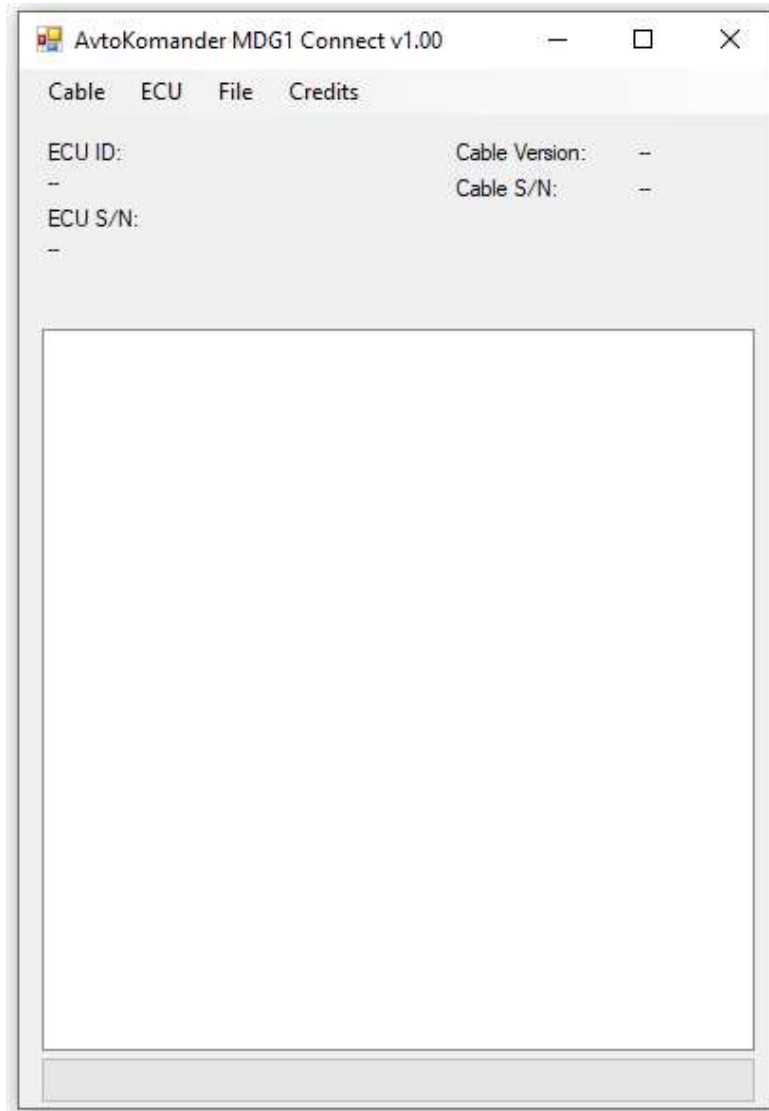

Menu Items:

Cable:

Connect to the AvtoKomander over USB. This must be done first. If the cable does not connect, verify the drivers are installed correctly. You can check if the drivers are installed correctly in windows under Device Manager, Com Ports.

ECU:

Identify, Read or Write the ECU module.

File:

Encrypt or decrypt an ECU file. Files read from an ECU are encrypted automatically with a hidden password. These files cannot be decrypted. If you are sharing files and would like them encrypted, use this feature. You can use the built-in password or your own.

Credits:


Check how many credits are available for use. One credit is good for one ECU.

Reading an ECU:

To read an ECU, click Read under the ECU menu item.

Writing an ECU:

To write an ECU, click Write under the ECU menu item. Select the file to flash to the ECU and allow the AvtoKomander to finish.

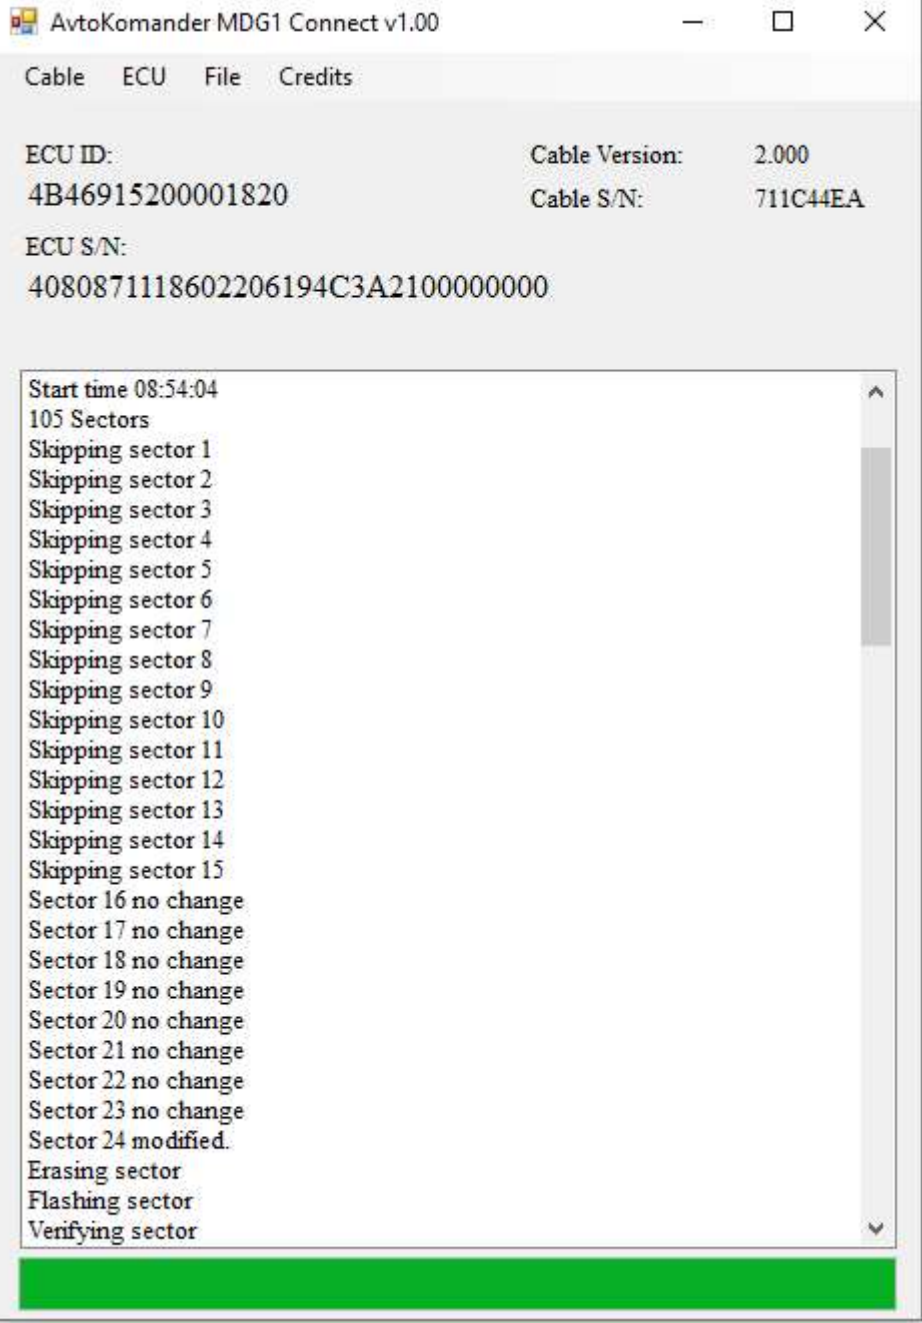

Tech Support Information:

When contacting tech support, be sure to include the ECU ID and serial number of the ECU. You can right click on them to copy the numbers.

